
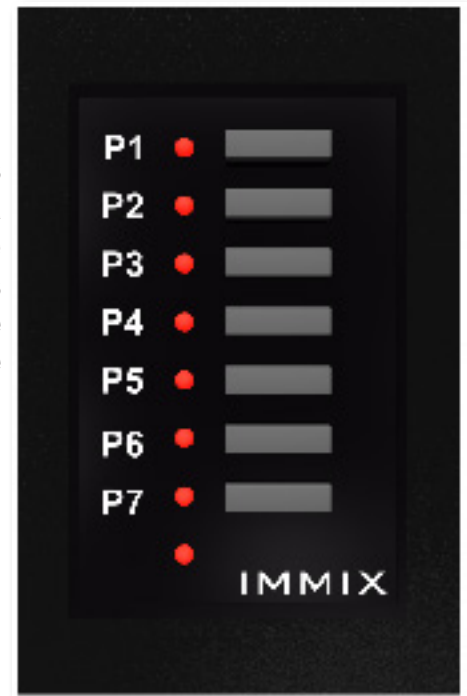


Overview

IMMIX Wall Mounted, Remote Station

This station allows two different areas to be assigned to a Wall Open/Close (Partition) Button. Pressing a partition button (labeled P1-P7) will combine the two different areas assigned to that button into one area. Combining the areas means that activating a preset (via another remote or a master station) on one station will activate the same preset on the other station. Pressing the partition button again will cause the stations to go back to being in two separate areas and operating individually. The stations are combined when the partition LED is lit. A maximum of seven different area pairs (one per button) may be assigned.

Partition Layout:

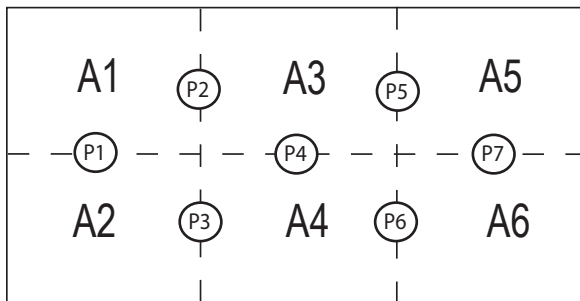

Ordering Information

Catalog #	Description
LD200RSRC	IMMIX Remote Station for Room Configuration

Complimentary Products	Catalog #	Description
	LD200MS	IMMIX Master Station
	LD200PB	IMMIX Power Booster
	LD200RS5P	IMMIX Remote Station
	LD200RS7P	IMMIX Remote Station
	LD200RSIR	IMMIX Infrared Receiver

Specifications:

Electrical


Network Connection Wire Type	Remote station provided with 6-wire pigtail Class 2, Belden # 9729 or equal for communication, plus two # 14 AWG wires for 12VDC control power
Maximum Distance	500 feet (152.4 meters) from LD200DIM to the farthest station. Consult factory for longer distances
Addressing	Press configuration button, adjust rotary dial

Environmental

Operating Temperature	0° to 125°F
Operating Humidity	20% - 95% RH, Non-condensing

Mechanical

Metal Plate	2.3" (5.84 cm) width X 4.36" (11.07 cm) height
Electronic Housing	1.8" (4.57 cm) width X 2.75" (6.99 cm) height X 1.5" (3.81 cm) depth
Back box	Recommend depth of 2.5" (6.35 cm)
Faceplate	High impact poly-carbonate with permanent legends, no visible mounting screws

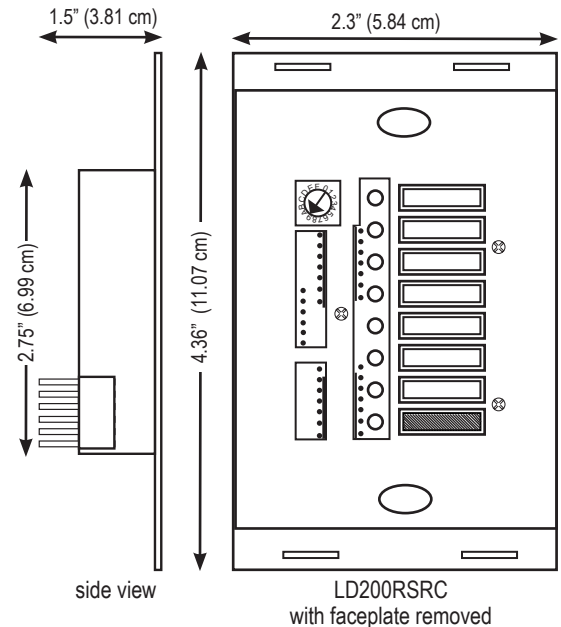

Sample System Architecture

